

UNIT-4

REINFORCED EARTH

- ✚ The concept of combining two materials of different strengths characteristics to form a composite material of greater strength is quite familiar in civil engineering practices and is in use for ages.
- ✚ The reinforced concrete constructions are examples for such composite materials.
- ✚ It combines the high tensile strength of steel with the high compressive, but relatively low tensile strength of concrete.
- ✚ Likewise, soils which have little if any tensile strength can also be strengthened by the inclusion of materials with high tensile strength.
- ✚ This mobilization of tensile strength is obtained by surface interaction between the soil and the reinforcement through friction and adhesion.
- ✚ The reinforced soil is obtained by placing extensible or inextensible materials such as metallic strips or polymeric reinforcement within the soil to obtain the requisite properties.
- ✚ Soil reinforcement through metallic strips, grids or meshes and polymeric strips sheets is now a well-developed and widely accepted technique of earth improvement.
- ✚ Anchoring and soil nailing is also adopted to improve the soil properties. The use of reinforced earth technique is primarily due to its versatility, cost effectiveness and ease of construction.
- ✚ The reinforced earth technique is particularly useful in urban locations where availability of land is minimum and construction is required to take place with minimum disturbance traffic.

Types of reinforcing materials:


i) Strips: These are flexible linear element normally having their breadth, „ b“ greater than their thickness, „t“. Dimensions vary with application and structure, but are usually within the range $t = 3-5 \text{ mm}$, $b = 5-100 \text{ mm}$. The most common strips are metals. The form of stainless, galvanized or coated steel strips being either plain or having several protrusions such as ribs or gloves to increase the friction between the reinforcement and the fill. Strips can also be formed from aluminum, copper, polymers and glass fibre reinforced plastic (GRP). Reed and bamboo reinforcements are normally categorized as strips, as are chains.

ii) Planks: Similar to strips except that their form of construction makes them stiff. Planks can be formed from timber, reinforced concrete or pre-stressed concrete. The dimensions of concrete planks vary; however, reinforcements with a thickness, „t“ =

SOIL REINFORCING TECHNIQUES

100 mm and breadth, $b = 200\text{--}300$ mm have been used. They have to be handled with care as they can be susceptible to cracking.


iii) Grids and Geogrids: Reinforcing elements formed from transverse and longitudinal members, in which the transverse members run parallel to the face or free edge of the structure and behave as abutments or anchors as shown

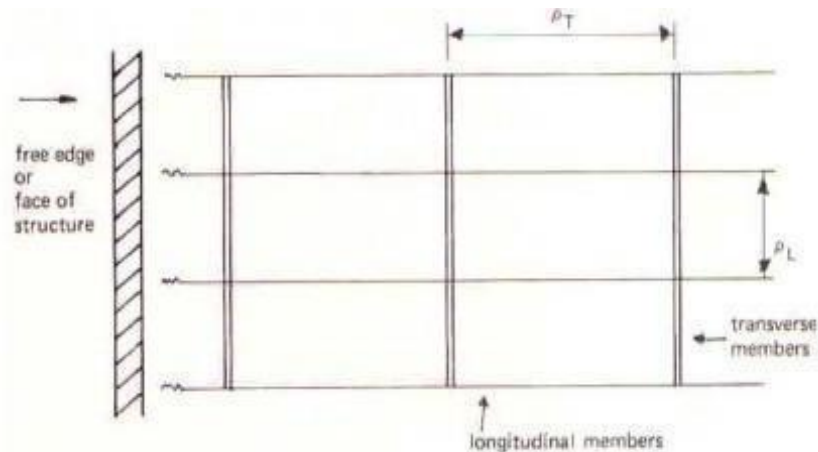

The main purpose is to retain the transverse members in position. Since the transverse members act as an abutment or anchor they need to be stiff relative to their length. The longitudinal members may be flexible having a high modulus of elasticity not susceptible to creep. The pitch of the longitudinal members, p_L is determined by their load carrying capacity and the stiffness of the transverse element. A surplus of longitudinal and transverse elements is of no consequence provided the soil or fill can interlock with the grid. Mono and Bi Oriented grid as shown



(a) Mono Oriented geogrid



(b) Bi-Oriented geogrid

SOIL REINFORCING TECHNIQUES

Grids can be formed from steel in the form of plain or galvanized weld mesh, or from expanded metal. Grids formed from polymers are known as “Geogrids” and are normally in the form of an expanded proprietary plastic product.

iv) Sheet reinforcement: May be formed from metal such as galvanized steel sheet, fabric (textile) or expanded metal not meeting the criteria for a grid.





v) Nailing: Earth may be protected by geo-synthetics with earth nailing.

vi) Anchors: Flexible linear elements having one or more pronounced protrusions or distortions which act as abutments or anchors in the fill or soil. They may be formed from steel, rope, plastic (textile) or combinations of materials such as webbing and tyres, steel and tyres, or steel and concrete




vii) Composite reinforcement: Reinforcement can be in the form of combinations of materials and material forms such as sheets and strips, grid and strips and anchors, depending on the requirements.

The Components Of Reinforced Earth

SOIL

-  It should be granular, cohesion less material, not too much silt or clay having particle size not more than 125 mm.
-  Not more than 10 percent of the particles shall pass 75 micron sieve & the earth reinforcement coefficient of friction to be either higher than or equal to 0.4 & Plasticity Index < 6.
-  The soil must have moisture content suitable for compaction.
-  The materials shall be substantially free of shale or other soft, poor durability particles.

SKIN

-  Skin is the facing element of the reinforced soil wall.
-  These elements keep the reinforcement at a desired elevation in the reinforced soil wall and also protect the granular at the edge falling off.
-  Made of either metal units or precast concrete panels.

SOIL REINFORCING TECHNIQUES

REINFORCING MATERIAL

A variety of materials can be used as reinforcing materials

- ✚ Steel
- ✚ Concrete
- ✚ Glass fibre
- ✚ Wood
- ✚ Rubber
- ✚ Aluminum
- ✚ Reinforcement may take the form of strips, grids, anchors & sheet material, chains, planks, rope, vegetation and combinations of these or other material forms.

THE DESIGN PRINCIPLES OF REINFORCED EARTH WALL


- ✚ Rankine or Columb earth pressure theory should be used
- ✚ Active earth pressure or passive earth pressure or at rest earth pressure are adopted.
- ✚ The various forces acting horizontal, vertical and shear stress should be distributed on reinforced earth.
- ✚ Suitable geometry surface failure is assumed on reinforced earth Reinforcing strip length can resist the failure occurred by the slippage.
- ✚ Safety factors are required and calculated from Rankine, Active earth pressure theory.
- ✚ The earth pressures on a reinforced earth walls can be calculated by both horizontal and vertical earth pressures

Factors affecting the behavior and Performance of Reinforced Soil

REINFORCEMENT	REINFORMENT DISTRIBUTION	SOIL	SOIL STATE	CONSTRUCTIO N
Forms(fibers,grid,anchor, bar,strip)	Location	Particle size	Density	Geometry of structure
Surface properties				compaction
Dimensions	Orientation	Grading	Over burden	Construction system
Strength		Mineral Content	States of stress	Aesthetics
Stiffness	Spacing	Index properties	Degree of Saturation	Durability

SOIL REINFORCING TECHNIQUES

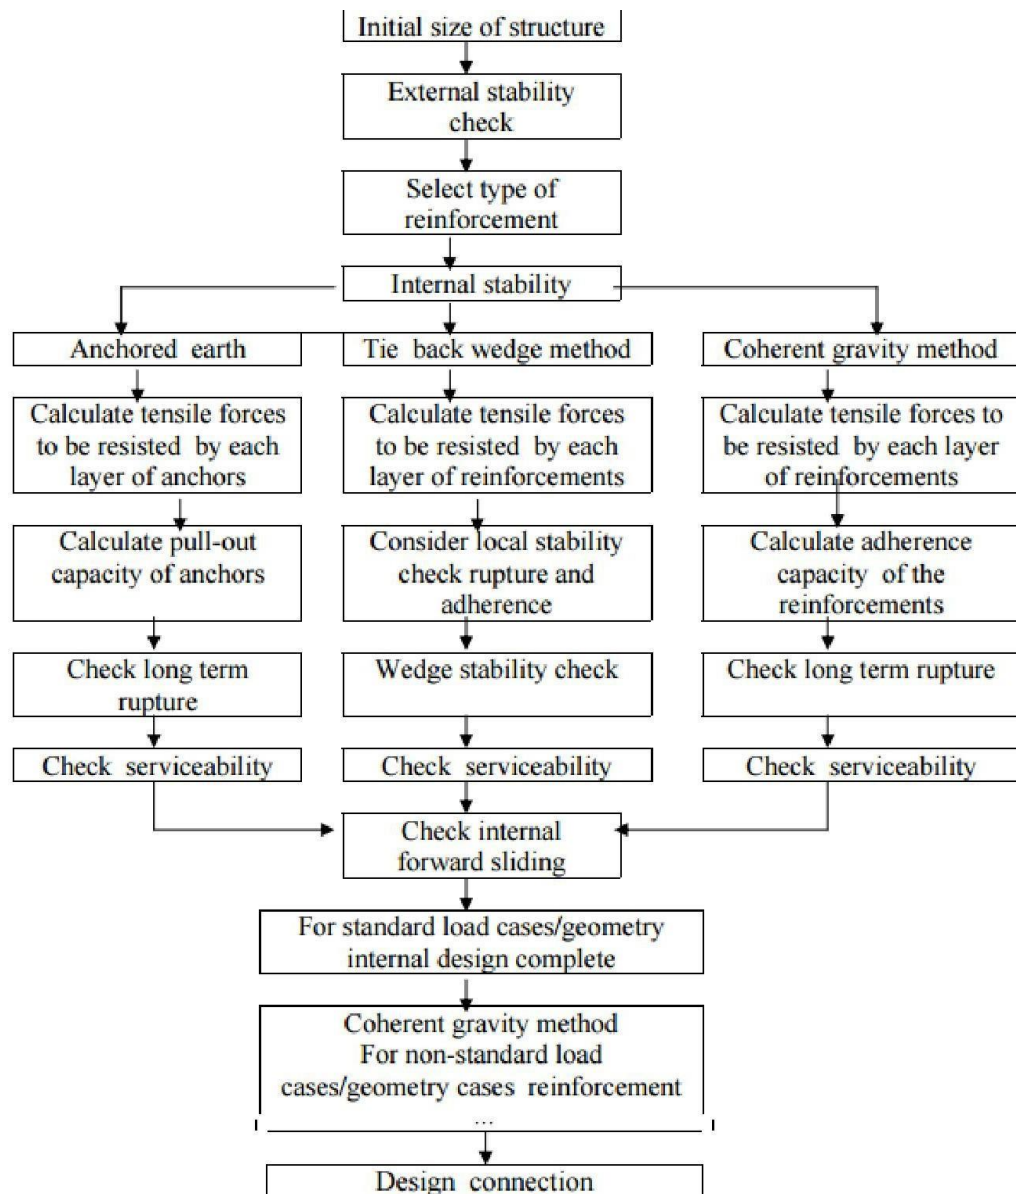


The Design Procedure For Reinforced Earth Wall In Form Of A Flowchart



Stability Checks:

External Stability (as for any earth-retaining structure)

The external stability of a reinforced soil wall is easily investigated since it behaves essentially as a rigid body and conforms to the simple laws of statics external stability assessment should consider the effects of dead loads, other loads (live load, dynamic load etc.) and forces acting on the structure. The failure for sliding, overturning, tilting/bearing and slip should be checked by external stability




-  Sliding
-  Overturning
-  Bearing Capacity

SOIL REINFORCING TECHNIQUES

Short and long term stability of soil needs to be considered to allow for the construction and in-service condition as well as in changes in pore water pressure. Passive earth pressure acting on the foot of the wall/structure below ground level may be ignored while considering various forces for stabilization.

Internal Stability (MSE retaining structures)

Stability within a reinforced structure is achieved by the reinforcing elements carrying tensile forces and then transferring to the soil by friction, friction and adhesion, or friction and bearing. In addition forces can be transferred the soil through fill trapped by the elements of the grid. The fill is than able to support the associated shear and compressive forces. In the case of anchored earth such as soil nailing, stability within a structure is achieved by the anchor elements carrying tensile forces and transferring these by friction along the anchor shaft or anchor loop and bearing of the anchor to the surrounding fill.

-  Reinforcement Failure
-  Pullout
-  Failure of Reinforcement/Facing Connection


Local stability check

The resistance of the reinforcing element should be checked against rupture and adherence failure whilst carrying the factored loads.

Wedge stability

The reinforcement structure will assume to fail internally in the form of wedge. It is not known at which level the wedge is originated. Therefore the wedge originate from different level to be checked. Checked for stability considering all the forces acting on it. Wedges are assumed to behave as rigid bodies and may be any size and shape. Stability of any wedge is maintained when friction forces acting on the potential failure plane in connection with the tensile resistance/ bond of the group of reinforcing elements or embedded in the fill beyond the plane are able to resist the applied loads tending to cause movement,

SOIL REINFORCING TECHNIQUES

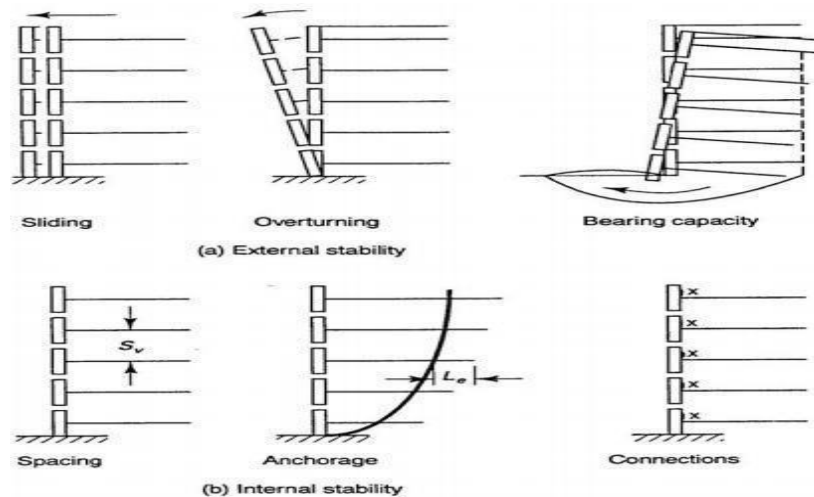

Geosynthetics

- Geo-synthetics are synthetic products used to stabilize terrain.
- These are human-made materials made from various types of polymers used to enhance, augment and make possible cost effective environmental, transportation and geotechnical engineering construction projects.
- They are used to provide one or more of the following functions; separation, reinforcement, filtration, drainage or liquid barrier.
- They are generally polymeric products used to solve civil engineering problems.
- These include eight main categories geotextiles, geogrids, geonets, geomembranes, geosynthetic clay liners, geofilm, geocells and geocomposites.
- The polymeric nature of the products makes them suitable for use in the ground where high levels of durability are required.
- They can also be used in exposed applications.
- Geo-synthetics are available in a wide range of forms and materials.

These products have a wide range of applications and are currently used in many civil, geotechnical, transportation, hydraulic and private development applications including roads, airfields, railroads, embankments, retaining structures, reservoirs, canals, dams, landfill liners, land fill covers structures.

The Important Properties Of Geo-Synthetics Required For Reinforcement Function

Basic Physical Properties

- Constituent material and method of manufacture
- Mass per unit area
- Thickness
- Roll width, roll length

SOIL REINFORCING TECHNIQUES

Mechanical properties

- a. Tensile strength
- b. Tensile modulus
- c. Seam strength
- d. Interface friction
- e. Fatigue resistance
- f. Creep resistance

Hydraulic Properties

- a. Compressibility
- b. Opening size
- c. Permittivity
- d. Transmissivity







Constructability/survivability Properties

- a. Strength and stiffness
- b. Tear resistance
- c. Puncture resistance
- d. Penetration resistance
- e. Burst resistance
- f. Cutting resistance
- g. Inflammability
- h. Absorption

Durability (Longevity)

- a. Abrasion resistance
- b. Ultra-violet stability
- c. Temperature stability
- d. Chemical stability
- e. Biological stability
- f. Wetting & drying stability

The Functions Of Geo-Synthetics

-  Reinforcement
-  Filtration
-  Separation
-  Drainage
-  Erosion Control
-  Barrier/Protection

SOIL REINFORCING TECHNIQUES

Reinforcement:

Reduction of Stress Intensity (Concentration) through Wider Distribution The stresses over the subgrade are higher in unreinforced flexible pavements than in geo-synthetic-reinforced pavement due to stress distribution factor

Reinforcement Mechanisms Induced by Geo-synthetics:

- (a) Lateral Restraint
- (b) Increased Bearing Capacity; and
- (c) Membrane Tension Support

Filtration

Retaining soil particles subjected to hydraulic forces which allow the passage of liquids/gases. This function is often partnered with separation.

Separation

- a. Preventing intermixing of soil types or soil/aggregate to maintain the integrity of each material yet still allow the free passage of liquids/gases. Commonly used in between sub-base/subgrade and around drainage materials.
- b. Contamination of the base course layers leads to a reduction of strength, stiffness and drainage characteristics, promoting distress and early failure of roadway.

Drainage

Allowing fluids and gases to flow both through the plan of the material. Commonly used as components in geo-composites used for surface water runoff or for gas collection under membranes.

Separation and Drainage Functions

- a. Piping Resistance: Apparent Opening Size - AOS (as related to soil retention),
- b. Permeability: Flow capacity, and clogging potential.
- c. Strength and Durability: Grab, Puncture strengths

Erosion Control

Protecting and reinforcing slopes and drainage channels from erosive agents whilst allowing the establishment of vegetation cover.

SOIL REINFORCING TECHNIQUES

Barrier/Protection

Preventing or limiting localized damage to an adjacent material, usually a geomembrane used to line a lagoon or a landfill. Thick geotextiles prevent puncture or excessive strain in the membrane.

Geo synthetics classified

Geo synthetics are classified as follows

- Geotextiles
- Geogrids
- Geonets
- Geo-membranes
- Geo-synthetic clay liners
- Geocells/geo web members
- Geofoam
- Geo-composites

Geotextiles are defined as “any permeable textile used with foundation soil, rock, earth, or any other geotechnical engineering-related material as an integral part of a human-made project, structure, or system”.

Geogrids

They have open grid like configuration i.e. they have large aperture between individual ribs. They have Low strain and stretch about 2% under load.

Strength is more than other common geotextiles. Function: Used exclusively for reinforcement

Geonets are open grid-like materials formed by two sets of coarse, parallel, extruded polymeric strands intersecting at a constant acute angle. The network forms a sheet with in-plane porosity that is used to carry relatively large fluid or gas flows.

Geomembranes are continuous flexible sheets manufactured from one or more synthetic materials. They are relatively impermeable and are used as liners for fluid or gas containment and as vapour barriers.

Geosynthetic clay liners (GCLs) are geocomposites that are prefabricated with a bentonite clay layer typically incorporated between a top and bottom geotextile layer or geotextile bentonite bonded to a geomembrane or single layer of geotextile. Geotextile-encased GCLs

SOIL REINFORCING TECHNIQUES

are often stitched or needle punched through the bentonite core to increase internal shear resistance. When hydrated they are effective as a barrier for liquid or gas and are commonly used in landfill liner applications often in conjunction with a geomembrane.

Geocells are relatively thick, three-dimensional networks constructed from strips of polymeric sheet. The strips are joined together to form interconnected cells that are infilled with soil and sometimes concrete. In some cases 0.5 m to 1 m wide strips of polyolefin geogrids have been linked together with vertical polymeric rods used to form deep geocell layers called geomattresses. soil confinement

Geofoam blocks or slabs are created by expansion of polystyrene foam to form a low-density network of closed, gas-filled cells. Geofoam is used for thermal insulation, as a lightweight fill or as a compressible vertical layer to reduce earth pressures against rigid walls.

Geocomposites are geosynthetics made from a combination of two or more geosynthetic types. Examples include: geotextile-geonet; geotextile-geogrid; geonet geomembrane; or a geosynthetic clay liner (GCL). Prefabricated geocomposite drains or prefabricated vertical drains (PVDs) are formed by a plastic drainage core surrounded by a geotextile filter.

The Properties Of Geotextiles

- Physical properties
 - Mechanical properties
 - Hydraulic properties
 - Endurance properties
 - Degradation properties

Physical properties of Geotextiles

- a. Specific gravity
- b. Mass per unit area
- c. Thickness
- d. Stiffness

Mechanical properties of Geotextiles

- a. Compressibility

SOIL REINFORCING TECHNIQUES

- b. Tensile strength
- c. Seam strength
- d. Fatigue strength
- e. Burst strength
- f. Tear strength
- g. Impact strength
- h. Puncture strength
- i. Friction strength
- j. Pull out strength

THE CLASSIFICATION OF GEO TEXTILES

Geotextile:

Geotextiles are polymer fabrics used in the construction of roads, drains, harbour works, and breakwaters, and for land reclamation and many other **civil engineering purposes**. Geotextiles, a newly emerging field in the civil engineering and other fields, offer great potential in varied areas of applications globally.

Types of geotextiles:

Geotextiles are a permeable synthetic material made of textile materials. They are usually made from polymers such as polyester or polypropylene. The **geotextiles** are further prepared in three different categories – woven fabrics, non-woven fabrics and knitted fabrics.

Woven Fabrics: Large numbers of geosynthetics are of woven type, which can be subdivided into several categories based upon their method of manufacture. These were the first to be developed from the synthetic fibers. As their name implies, they are manufactured by adopting techniques which are similar to weaving usual clothing textiles. This type has the characteristic appearance of two sets of parallel threads or yarns. The yarn running along the length is called warp and the one perpendicular is called weft.



Woven fabric

The majority of low to medium strength woven geosynthetics are manufactured from polypropylene which can be in the form of extruded tape, silt film, monofilament or multifilament. Often a combination of yarn types is used in the warp and weft directions to

SOIL REINFORCING TECHNIQUES


optimize the performance/cost. Higher permeability is obtained with monofilament and multifilament than with flat construction only.

Non-woven: Non-woven geo-synthetics can be manufactured from either short staple fibre or continuous filament yarn. The fibers can be bonded together by adopting thermal, chemical or mechanical techniques or a combination of techniques. The type of fibre (staple or continuous) used has very little effect on the properties of the non – woven geo synthetics. Non-woven geotextiles are manufactured through a process of mechanical interlocking or chemical or thermal bonding of fibres/filaments. Thermally bonded non-wovens contain wide range of opening sizes and a typical thickness of about 0.5-1 mm while chemically bonded non-wovens are comparatively thick usually in the order of 3 mm. On the other hand mechanically bonded non-wovens have a typical thickness in the range of 2-5 mm and also tend to be comparatively heavy because a large quantity of polymer filament is required to provide sufficient number of entangled filament cross wires for adequate bonding.



Nonwoven



Knitted Fabrics: Knitted geosynthetics are manufactured using another process which is adopted from the clothing textiles industry, namely that of knitting. In this process interlocking a series of loops of yarn together is made. An example of a knitted fabric is illustrated in figure. Only a very few knitted types are produced. All of the knitted geosynthetics are formed by using the knitting technique in conjunction with some other method of geosynthetics manufacture, such as weaving.

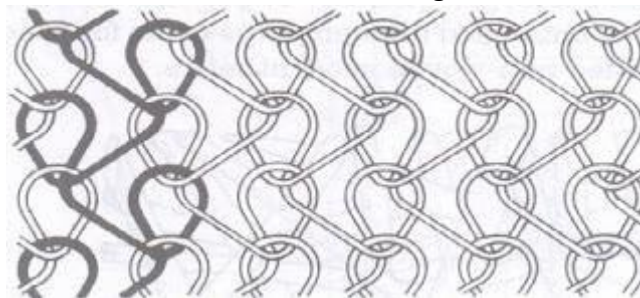

Knitted fabric

Apart from these three main types of geotextiles, other geosynthetics used are geonets, geogrids, geo-cells, geo membranes, geo composites, etc. each having its own distinct features and used for special applications.

SOIL REINFORCING TECHNIQUES

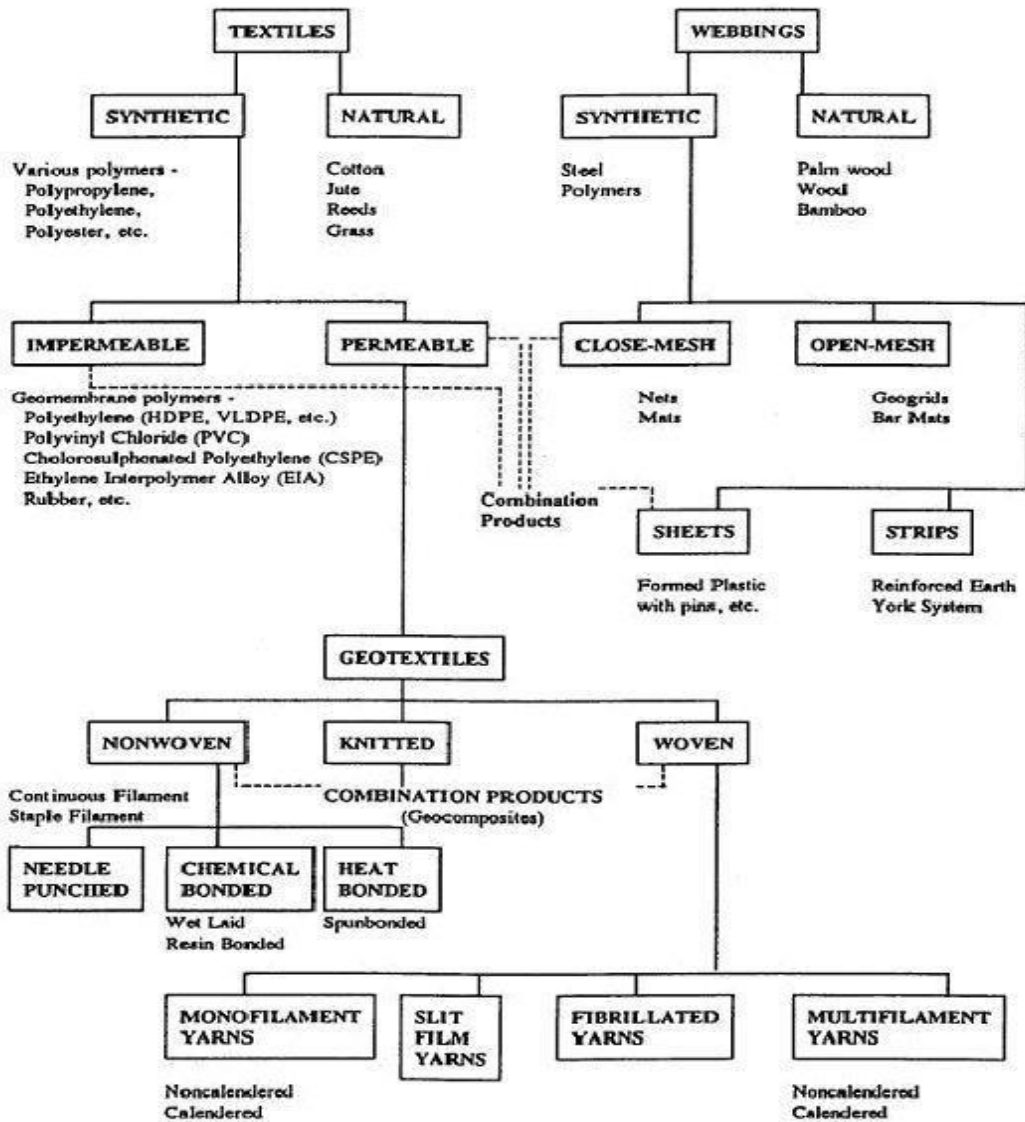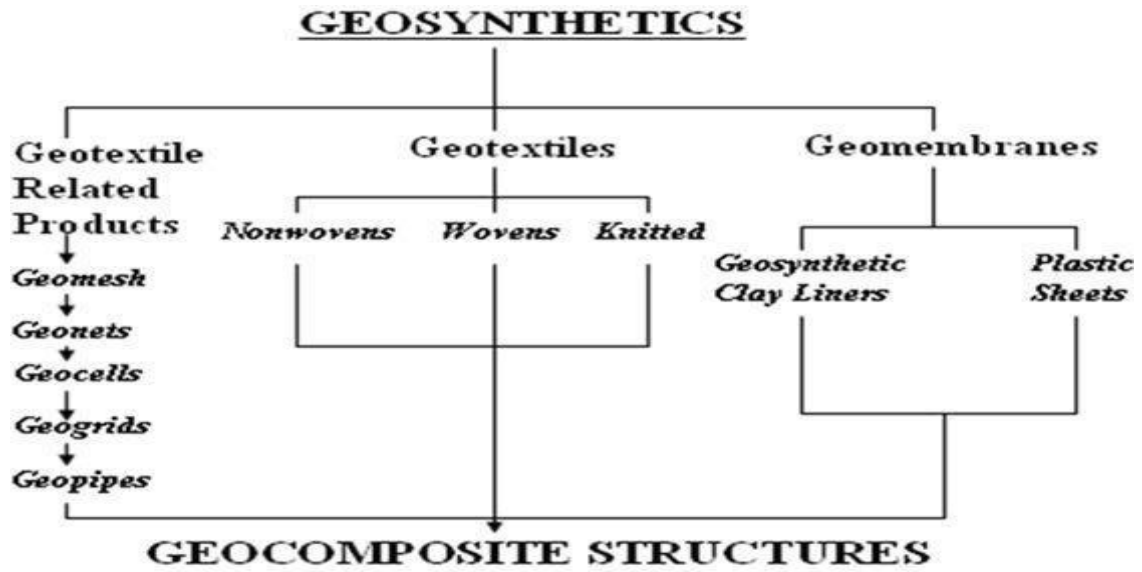

SOIL REINFORCING TECHNIQUES

Applications And The Purpose Of Geotextiles And Geomembranes

✚ **Pavements on soft soil**
Increase in bearing capacity

✚ **Pavement overlays Inhibit**
crack propagation.

✚ Rail roads

Prevent ballast contamination, distribute load on subgrade.

Embankments

Improve stability, provide drainage.

Retaining structures Reinforce
and protect backfill

Natural slopes

Protect slope against erosion, reinforce soil, and provide drainage.

Rivers, canals and reservoirs

Replace or improve traditional filter layers, erosion control.

➤ Water pollution control

Extract and collect granular pollutants, reinforce and protect geomembranes, relieve pore water or gas pressure below membranes.

✚ Shore protection

Prevent erosion and sand migration, act as filter and drainage layer

Building elements

Form soil- cement filled bags and tubes to create columns

IMPORTANT QUESTIONS

- (a) Write the advantages and applications of reinforced earth structures with neat sketches.

(b) Discuss the external stability aspects in the design of reinforced earth wall.
- (a) What is the main difference between geo-grid and geo-textile? Explain the field applications of geo-grid and geo-textiles.

(b) Explain separation and filtration functions of geo-textile. Mention applications based on these functions.
- (a) What is the objective of soil reinforcement?

(b) What are the factors governing the design of reinforced earth walls?
- (a) What are geomembranes? How geomembranes differ from geo textiles?

(b) What are the applications of geotextiles?
- Explain the basic mechanism of reinforced earth. Discuss the various design formulae in reinforced earth wall.
- (a) What are geotextiles? Write a note on common nomenclature of geosynthetics.

(b) Explain with suitable examples the principles involved in geo-textile material as reinforcement for improving the bearing capacity of soil.
- (a) Explain any four engineering applications of reinforced earth with sketches.

(b) Describe the procedure of designing a reinforced earth wall.
- (a) Distinguish between geo textiles and geo grids.

SOIL REINFORCING TECHNIQUES

- (b) Explain the applications of geo-textiles based on their separation and drainage functions.
9. Explain the design principle of reinforced earth wall.
 10. Explain clearly the functions of Geotextiles.
 11. (a) What is reinforced earth? How does it differ from reinforced cement concrete and mechanically stabilized soil?
(b) Distinguish between “frictional fill” and “cohesive frictional fill” used in reinforced earth constructions.
 12. (a) Distinguish between woven and non woven geotextiles. How they are manufacture and what functions they can perform?
(b) What is a geo-grid? Explain different types of geo grids. How do they differ from geotextiles functionally?
 13. (a) What are the factors governing design of reinforced wall?
(b) With a neat sketch explain the various components of reinforced earth structure.
 14. (a) What polymers are used as geosynthetics? What are their properties?
(b) Compare geotextiles and geomembrane.